


RE 25 Ø25 mm, Graphite Brushes, 20 Watt

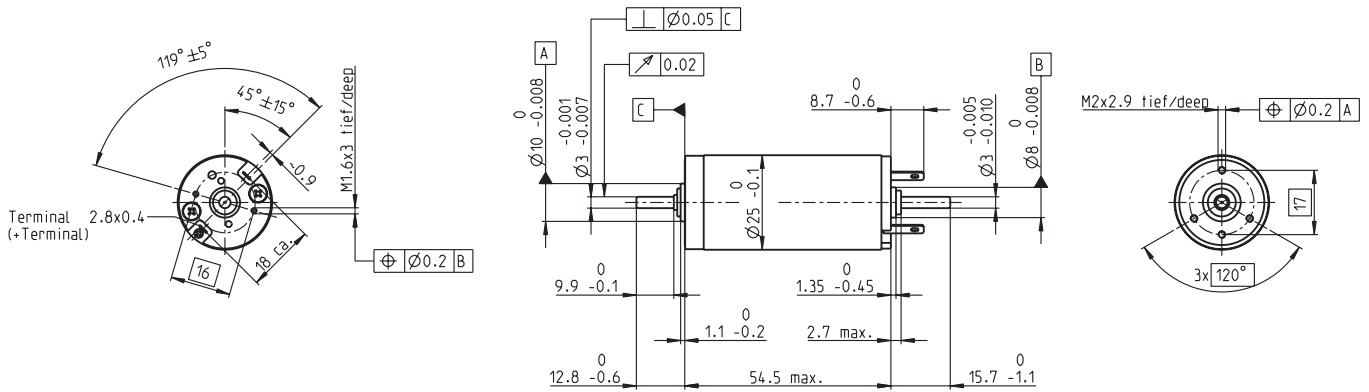

M 1:2

- Stock program
- Standard program
- Special program (on request)

according to dimensional drawing
shaft length 15.7 shortened to 4 mm

Order Number

118749	118750	118751	118752	118753	118754	118755	118756	118757
302002	302003	302004	302005	302006	302007	302001	302008	302009

Motor Data

Values at nominal voltage																				
1	Nominal voltage	V	9.0	15.0	18.0	24.0	30.0	42.0	48.0	48.0	48.0									
2	No load speed	rpm	10000	9650	10200	9550	9860	11100	10300	8230	5050									
3	No load current	mA	110	60.7	53.9	36.9	30.5	25.2	20.1	15.2	8.51									
4	Nominal speed	rpm	8980	8470	8890	8360	8680	9950	9190	7070	3870									
5	Nominal torque (max. continuous torque)	mNm	11.1	20.6	23.1	26.7	27.2	27.6	28.4	29.4	30.8									
6	Nominal current (max. continuous current)	A	1.50	1.50	1.47	1.17	0.983	0.799	0.667	0.548	0.352									
7	Stall torque	mNm	244	237	233	257	263	299	280	222	136									
8	Starting current	A	30.7	16.6	14.3	11.0	9.21	8.39	6.38	4.03	1.52									
9	Max. efficiency	%	77	83	84	86	86	88	88	87	85									
Characteristics																				
10	Terminal resistance	Ω	0.293	0.902	1.26	2.19	3.26	5.00	7.53	11.9	31.6									
11	Terminal inductance	mH	0.0275	0.0882	0.115	0.238	0.353	0.551	0.832	1.31	3.48									
12	Torque constant	mNm / A	7.97	14.3	16.3	23.4	28.5	35.7	43.8	55.0	89.7									
13	Speed constant	rpm / V	1200	669	585	407	335	268	218	173	106									
14	Speed / torque gradient	rpm / mNm	44.1	42.3	45.3	38.1	38.2	37.5	37.4	37.6	37.5									
15	Mechanical time constant	ms	5.36	4.58	4.49	4.28	4.20	4.13	4.11	4.10	4.09									
16	Rotor inertia	gcm ²	11.6	10.3	9.45	10.7	10.5	10.5	10.5	10.4	10.4									

Specifications


- Thermal data**
- 17 Thermal resistance housing-ambient 14 K / W
 - 18 Thermal resistance winding-housing 3.1 K / W
 - 19 Thermal time constant winding 12.4 s
 - 20 Thermal time constant motor 910 s
 - 21 Ambient temperature -30 ... +100°C
 - 22 Max. permissible winding temperature +125°C
- Mechanical data (ball bearings)**
- 23 Max. permissible speed 14000 rpm
 - 24 Axial play 0.05 - 0.15 mm
 - 25 Radial play 0.025 mm
 - 26 Max. axial load (dynamic) 3.2 N
 - 27 Max. force for press fits (static) 64 N (static, shaft supported) 270 N
 - 28 Max. radial loading, 5 mm from flange 16 N

- Other specifications**
- 29 Number of pole pairs 1
 - 30 Number of commutator segments 11
 - 31 Weight of motor 130 g

Values listed in the table are nominal.
Explanation of the figures on page 49.

- Option**
- Preloaded ball bearings

Operating Range

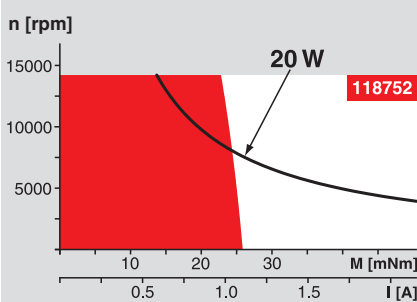


Comments

- Continuous operation**
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
- Short term operation**
The motor may be briefly overloaded (recurring).
- **Assigned power rating**

maxon Modular System

Overview on page 16 - 21

- Planetary Gearhead**
Ø26 mm
0.5 - 2.0 Nm
Page 228
- Planetary Gearhead**
Ø32 mm
0.75 - 6.0 Nm
Page 230 / 231 / 233
- Koaxdrive**
Ø32 mm
1.0 - 4.5 Nm
Page 236
- Spindle Drive**
Ø32 mm
Page 249 / 250 / 251

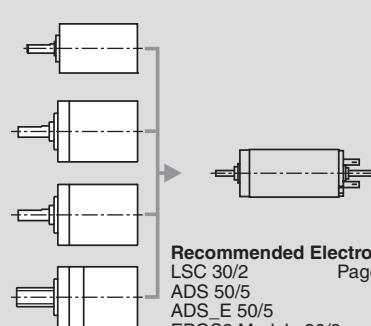

- Recommended Electronics:**
- LSC 30/2 Page 282
 - ADS 50/5 282
 - ADS_E 50/5 283
 - EPOS2 Module 36/2 304
 - EPOS2 24/5 305
 - EPOS2 50/5 305
 - EPOS2P 24/5 308
 - Notes 18

- Encoder MR**
128 - 1000 Imp.,
3 channels
Page 262
- Encoder Enc**
22 mm
100 Imp., 2 channels
Page 264
- Encoder HED_5540**
500 Imp.,
3 channels
Page 266 / 268
- DC-Tacho DCT**
Ø22 mm,
0.52 V
Page 276
- Brake AB 28**
24 VDC
0.4 Nm
Page 318